



ZP400A1100~2000V

Y30ZPC

国标型-普通整流管(平板式)

Chinese Type Rectifier Diodes (Capsule Version)


LiuJing rectifier co., Ltd.

## FEATURES

- 1). Low forward voltage drop
- 2). High reverse voltage
- 3). Hermetic metal cases with ceramic insulators

## TYPICAL APPLICATIONS

- 1). All purpose high power rectifier diodes
  - 2). High power resistance welding equipment
  - 3). Non-controllable and half-controllable rectifiers
  - 4). Controlled rectifiers
- |             |                 |
|-------------|-----------------|
| $I_{F(AV)}$ | 1276 A          |
| $V_{RRM}$   | 200~1000 V      |
| $I_{FSM}$   | 11 KA           |
| $I^2t$      | 605 $10^3 A^2S$ |

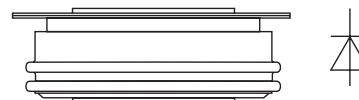

## THE MAIN PARAMETERS

SYMBOL		TEST CONDITIONS	$T_j(^{\circ}C)$	VALUE			UNIT
				Min	Type	Max	
$I_{F(AV)}$	Mean forward current	$180^{\circ}$ half sine wave 50Hz Double side cooled, $T_{hs}=55^{\circ}C$ $T_{hs}=162^{\circ}C$	190			1276 400	A
$V_{RRM}$	Repetitive peak reverse voltage	$V_{RRM}$ tp=10ms, $V_{RSM}=V_{RRM}+100V$	190	200		1000	V
$I_{RRM}$	Repetitive peak current	$V_{RM}=V_{RRM}$	190			30	mA
$I_{FSM}$	Surge on-state current					11	KA
$I^2t$	$I^2T$ for fusing coordination	10ms half sine wave, $V_R=0.6V_{RRM}$	190			605	$A^2s*10^3$
$V_{FO}$	Threshold voltage		190			0.95	V
$r_F$	Forward slop resistance					0.31	$m\Omega$
$V_{FM}$	Peak on-state voltage	$I_{TM}=1200A$ , F=7KN	190			1.35	V
$I_{rm}$	Reverse recovery current					75	A
$t_{rr}$	Reverse recovery time	$I_{TM}=1000A$ , tp=1000 $\mu s$ , di/dt=-20A/ $\mu s$ , $V_R=50V$	190			4	$\mu s$
$Q_{rr}$	Recovery charge					160	$\mu C$
$R_{th(j-h)}$	Thermal resistance Junction to heatsink	At $180^{\circ}$ sine, double side cooled Clamping force 7.0KN				0.055	$^{\circ}C /W$
$F_m$	Mounting force			5.3		10	KN
$T_{stg}$	Stored temperature			-40		200	$^{\circ}C$
$W_t$	Weight				80		g
Size	Package box size			$95 \times 95 \times 50$			mm

## PERFORMANCE CURVES FIGURE

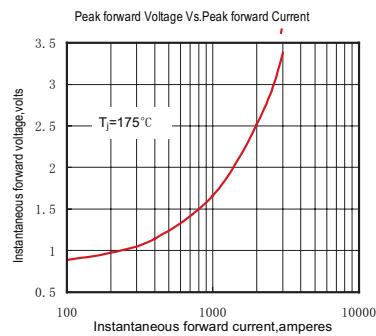


Fig.1

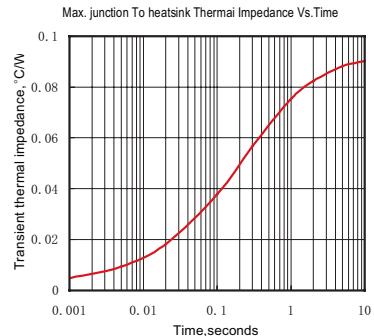


Fig.2

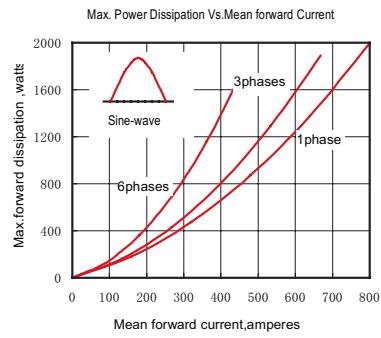


Fig.3

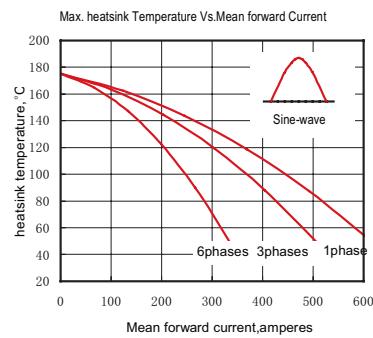


Fig.4

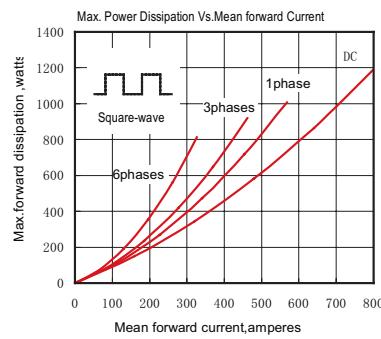


Fig.5

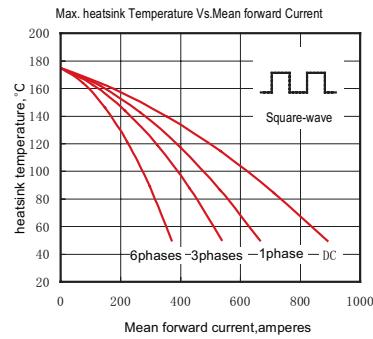


Fig.6

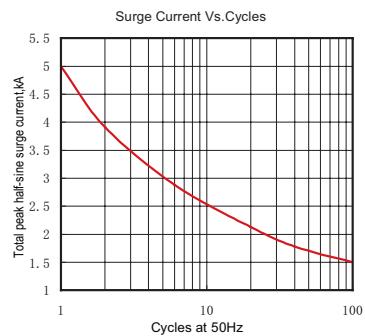


Fig.7


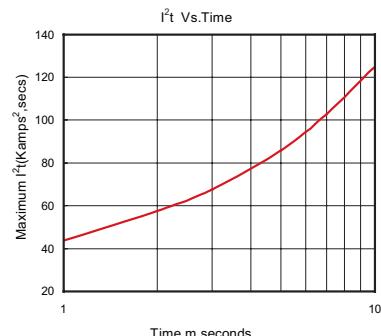


Fig.8

## OUTLINE

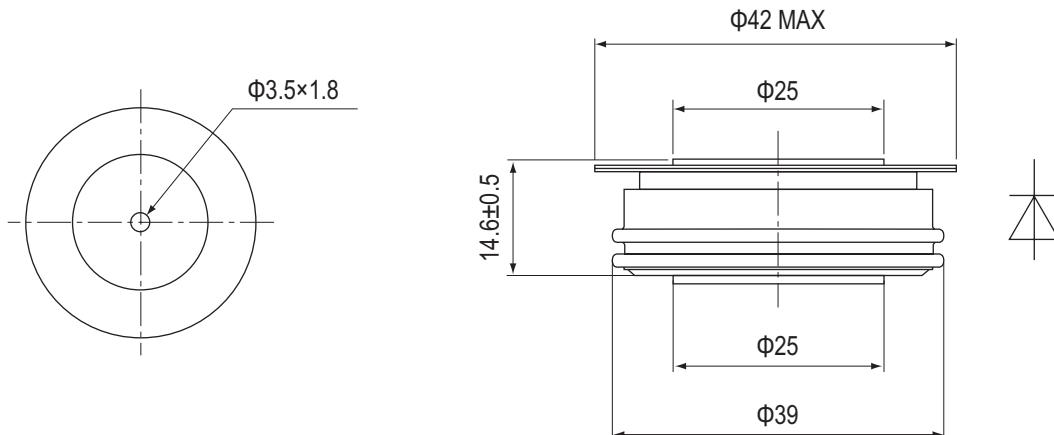

### YUEQING LIUJING RECTIFIER CO., LTD

Sale Department: LiuJing Building, Yueqing City,  
 Zhejiang Province

Add: Wanao Industrial Zone, Yueqing city,  
 Zhejiang Province

Tel: 0086-577-62519692 0089-577-62519693

Fax: 0086-577-62518692

International Export: 0086-577-62571902

Technical Support: 0086-15868768965

After Service: 400-6606-086

<http://www.china-liujing.com>

<http://www.liujingdianqi.cn>

<http://www.cnrectifier.com>

<http://www.cnthyristor.com.cn>

MSN: thristors@hotmail.com

**打造最具竞争力的电力半导体产品**

To be the most competitive Power Semiconductor  
 Devices manufactory.

LIUJING reserves the right to change limits, test conditions and dimensions.

윤정은 이 칼타로그 중에 데이터, 테스트 조건, 외형사이즈에 대한 최종 해석권을 가지고 있습니다.